

Installation Instructions

Ground Fixed Calypso Chimes Page 1 of 4



Weight of heaviest part 7.5kg

1. Instrument will arrive on site fully assembled. **(1.1)**
(See Assembly Guide)



2. Attach Ground Fixing studs holes in base of centre post **(1.2)** (See Ground Fix Post Installation Sheet)

3. Excavate 1 hole for the Steel legs **250mm diameter** by **450mm deep** in desired location upon decision from customer.

4. Locate (lower) leg into hole, making sure it is vertical and level prior to concreting in place.

5. Once happy with location of the Instrument, **fill** holes using rapid hardening **concrete**. Be sure to compact concrete around legs and leave to dry according to manufactures guidelines.

6. Attach the holder, beater and the saddle strap on each side of the post. **(1.3)**

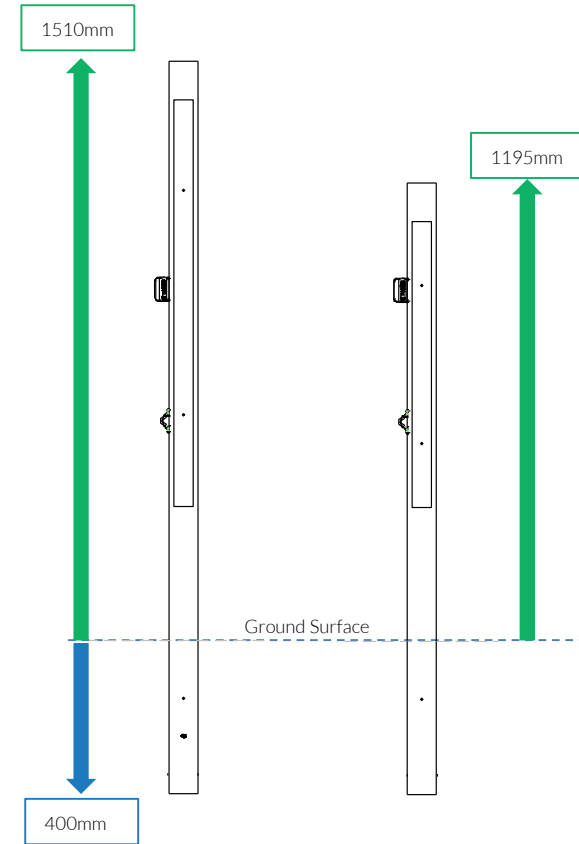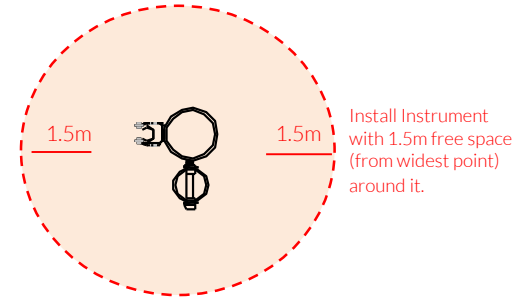

Instrument Components Per Post:

-  x4
M6x20 Security Screw
-  x1
M6 Saddle Strap
-  x2
M6 Square Nut
-  x1
Beater Holder

Metric Conversion:
250mm/ 10"
400mm/ 16"
450mm/ 18"
1510mm/ 59"
1195mm/ 47 3/64"
1.5m/ 59"

Ground Fix Components Per Post:

-  x2
M10x200 Bolt
-  x4
M10 Nut



Single Small Red Beaters X1

Spares available from
www.musical-play.com or
from your local distributor

8 Kg

Assembly Guide PPRCHP

Tools:







x1
TX 30 Driver Bit




Ground Fixed
Calypso Chimes
Page 2 of 4







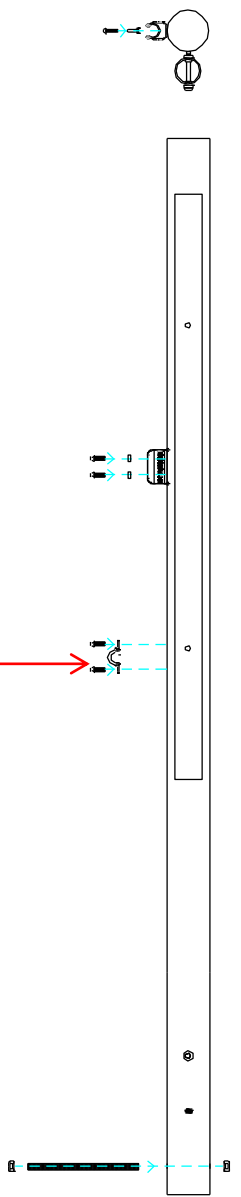

Instrument
Components Per Post:


-  x4
-  x1
-  x2
-  x1

Thread Lock Solution
Required (Not Supplied)



COMPONENTS LIST:

-  M10 Nut X4
-  M10x200 Threaded Bar X2
-  Saddle Strap X2
-  M6x20 Pin torx X4
-  M6 Square Nut X2
-  Beater Holder X1



Single Small Red
Beaters X1

Ground Fix
Components Per Post:

-  x2
-  x4

Spares available from
www.musical-play.com or
from your local distributor

8 Kg

Assembly Guide PPCALCH



Ground Fixed
Calypso Chimes
Page 3 of 4





Instrument
Components Per Post:

-  x4
-  x1
-  x2
-  x1

600mm min spacing

Thread Lock Solution
Required (Not Supplied)

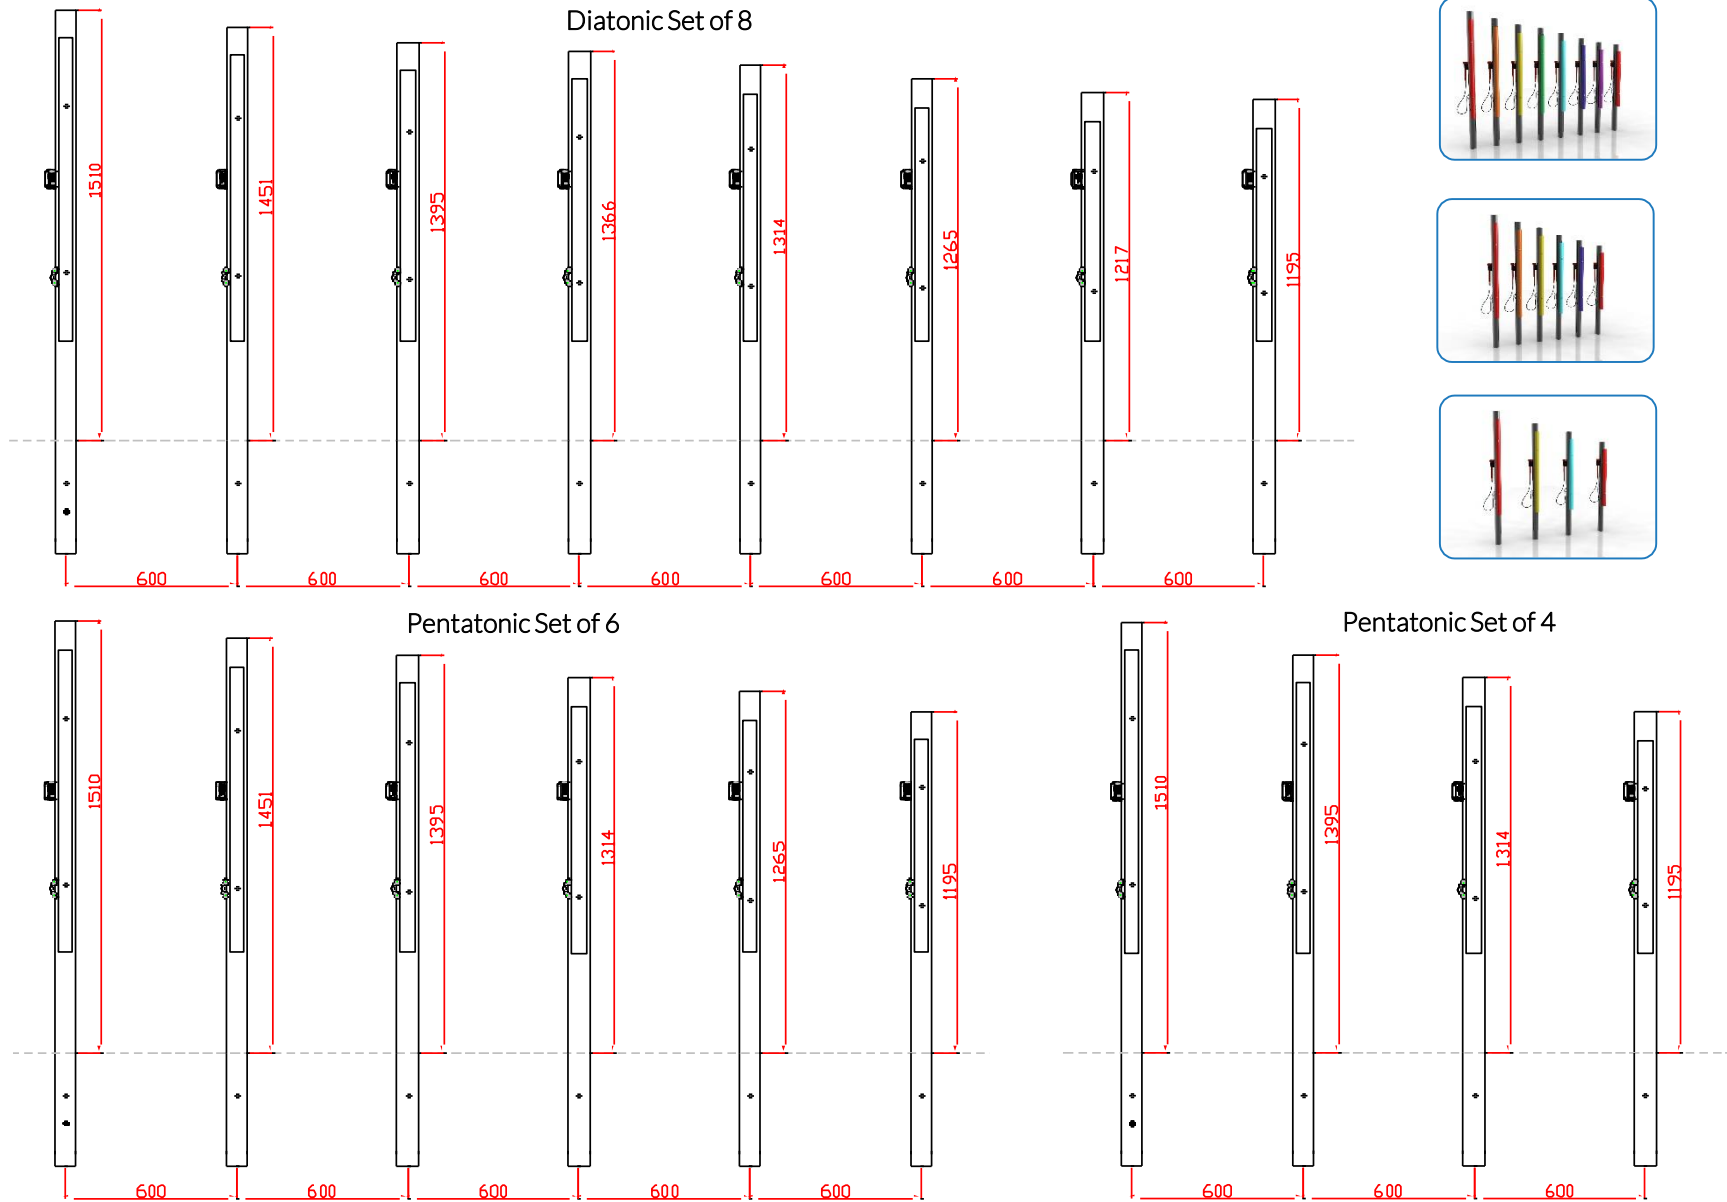

Single Small Red
Beaters X1

Ground Fix
Components Per Post:

-  x2
-  x4

Spares available from
www.musical-play.com or
from your local distributor

8 Kg

Ground Fix Post Installation




Ground Fixed
Calypso Chimes
Page 4 of 4




Instrument
Components Per Post:



Metric Conversion:
50mm/ 2"
250mm/ 10"
350mm/ 14"
400mm/ 16"
450mm/ 18"

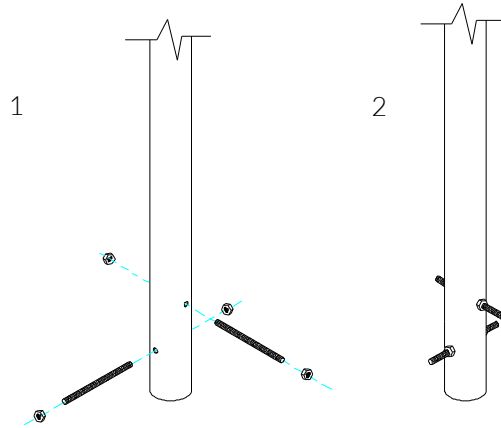


Fix M10x 200 Threaded bar
in place using M10 Nuts

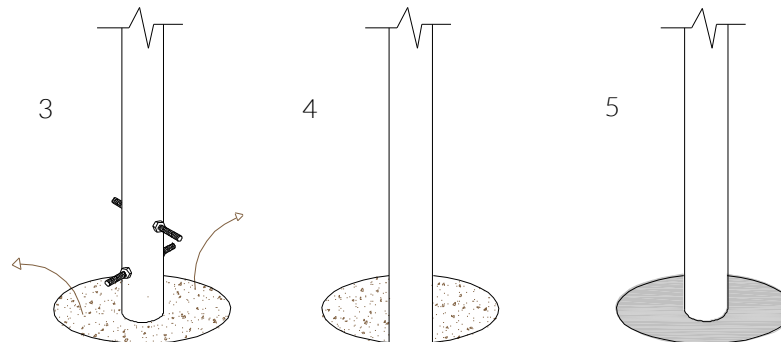

Excavate 1 holes with a
250mm diameter tapering
down to 350mm diameter
and 450mm depth

Compact base of hole with
50mm of aggregate.
Lower ground Fix post
into hole (check
instrument straight and
level before filling with
concrete)

Fix hole with fast drying
concrete to manufacturers
specifications.

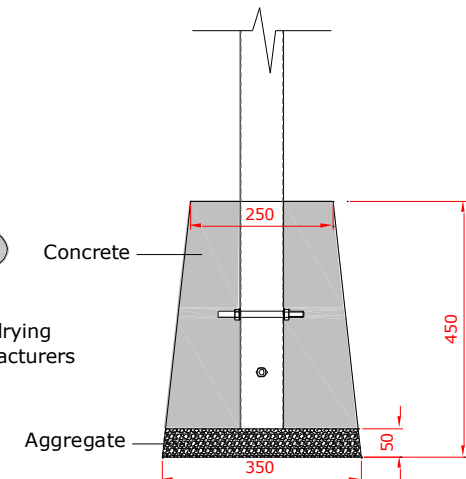

400mm min depth