

Surface Fixed

Tubular Bells Page 1 of 4



Instrument Components:

Tubular Bells are preassembled

Installation Instructions



1.Locate Base in desired location before attaching the surface using pre drilled holes Not supplied) Recommended

2. Assemble Upper 3 Base sections using M8 x 16 mm CSK screws provided (1.1)


3. Using the M10x 40 screw and Barrel Nuts to attach each of the 9 legs to the base (1.2)

4. Make sure that all fixings are tightly secured and thread locking solution used if

required.

1.2

bells. Fix lower sections to provided. (Surface Anchors M10 Female Rawl Bolts or chemical anchors

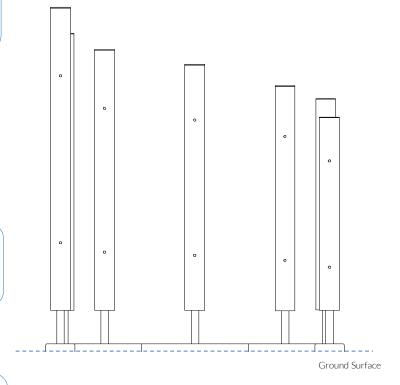

Tubular Bells will arrive on

site pre assembled

Weight of heaviest part 30kg (ALU Base)



1.1

Surface Fix Components:







M8x16 CSK Security Screw




Surface Fixed

Tubular Bells Page 2 of 4



Instrument Components:

Tubular Bells Are Preassembled

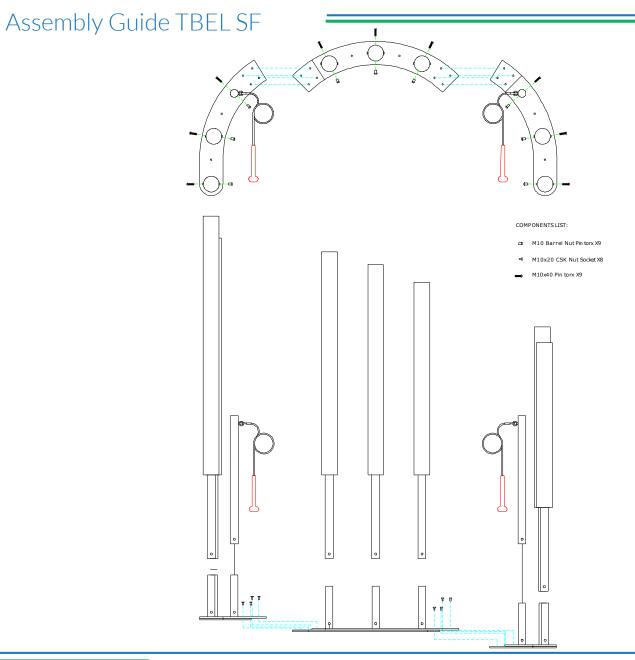









Tools:

TX 45 Driver Bit

Assembly Guide TBEL SF




Surface Fixed

Tubular Bells Page 3 of 4



Instrument Components:

Tubular Bells Are Preassembled

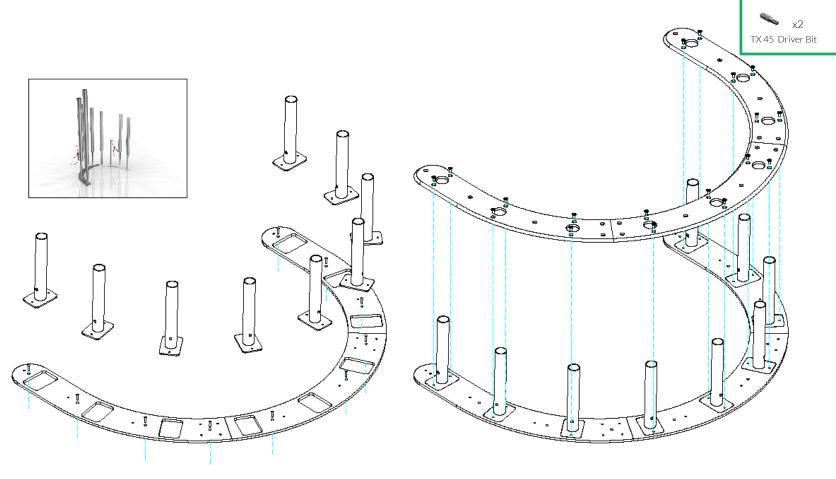

Mount this section of each base to the deck Deck Anchors Not provided using pre drilled holes

Insert instrument plates with stanchions and attach with CSK M8x16mm Screws provided











Tools:

Assembly Guide TBEL SF






Surface Fixed

Tubular Bells Page 4 of 4




Instrument Components:

Tubular Bells Are Preassembled

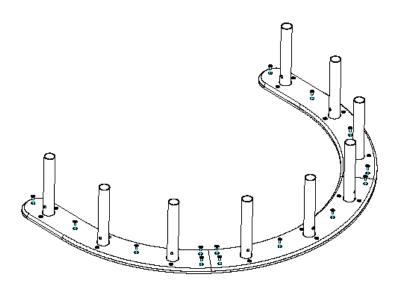

Join the upper and lower base sections with CSK M8x16mm Screws provided

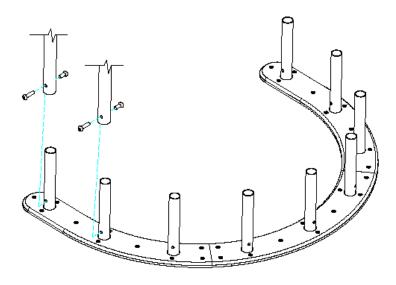

Lower Instrument over the stanchions and attach with fixings provided(see surface fix installation instructions)



